


Sintered Steel Bushing SLR Double Pitch Roller Chains

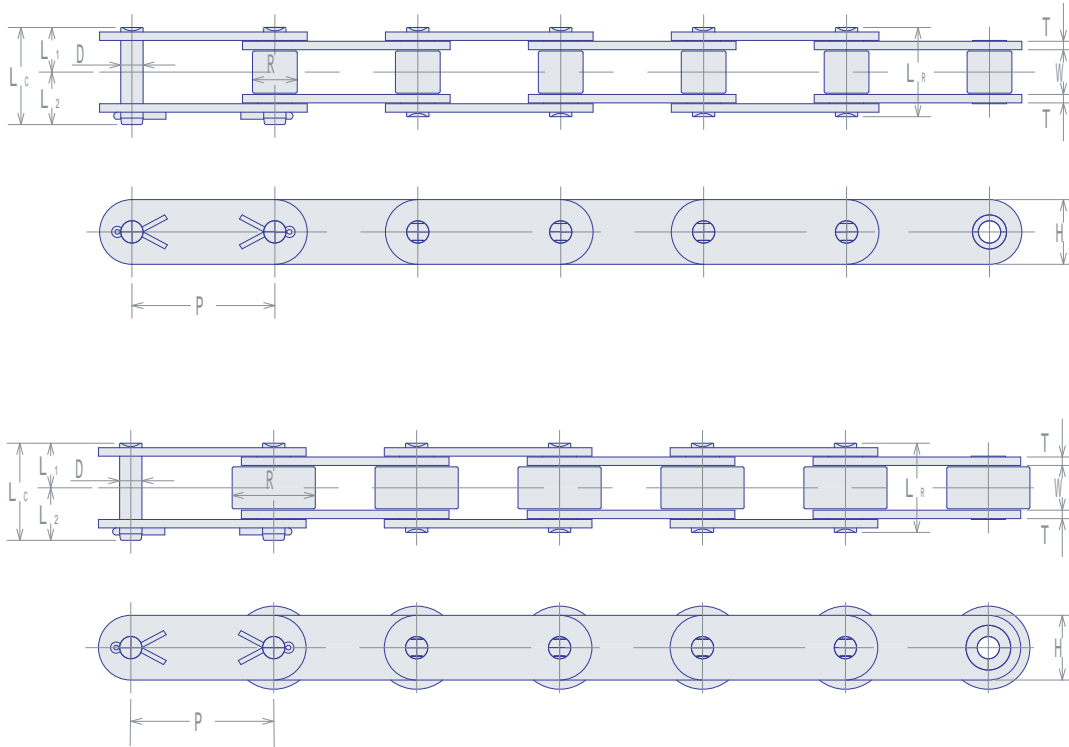

CONVEYOR SERIES (STANDARD ROLLER TYPE)

| SY Chain No. | Dimensions - mm | | | | | | | | | | Average Ultimate Strength | Maximum Allowable Load | Average Chain Weight |
|--------------|-----------------|--------|-------|------|--------|------|------|--------|--------|-----|---------------------------|------------------------|----------------------|
| | Pitch | Roller | | Pin | | | | Plate | | | | | |
| | | Width | Dia. | Dia. | Length | | | Height | Thick. | | | | |
| | | P | W | R | D | LR | LC | L1 | L2 | H | | | |
| C 2040-SLR | 25.40 | 7.95 | 7.92 | 3.96 | 16.5 | 18.5 | 8.3 | 10.2 | 11.5 | 1.5 | 15.7 | 2.65 | 0.5 |
| C 2050-SLR | 31.75 | 9.53 | 10.16 | 5.08 | 20.5 | 22.5 | 10.3 | 12.2 | 15.1 | 2.0 | 25.5 | 4.31 | 0.8 |
| C 2060H-SLR | 38.10 | 12.70 | 11.91 | 5.95 | 29.1 | 31.5 | 14.6 | 16.9 | 17.2 | 3.2 | 37.3 | 6.28 | 1.4 |
| C 2080H-SLR | 50.80 | 15.88 | 15.88 | 7.93 | 35.8 | 39.0 | 17.9 | 21.1 | 22.8 | 4.0 | 63.7 | 10.7 | 2.4 |
| C 2100H-SLR | 63.50 | 19.05 | 19.05 | 9.53 | 42.7 | 46.6 | 21.4 | 25.2 | 28.8 | 4.8 | 100 | 17.1 | 3.5 |

CONVEYOR SERIES (CARRIER ROLLER TYPE)

| SY Chain No. | Dimensions - mm | | | | | | | | | | Average Ultimate Strength | Maximum Allowable Load | Average Chain Weight |
|--------------|-----------------|--------|-------|------|--------|------|------|--------|--------|-----|---------------------------|------------------------|----------------------|
| | Pitch | Roller | | Pin | | | | Plate | | | | | |
| | | Width | Dia. | Dia. | Length | | | Height | Thick. | | | | |
| | | P | W | R | D | LR | LC | L1 | L2 | H | | | |
| C 2042-SLR | 25.40 | 7.95 | 7.92 | 3.96 | 16.5 | 18.5 | 8.3 | 10.2 | 11.5 | 1.5 | 15.7 | 2.65 | 0.82 |
| C 2052-SLR | 31.75 | 9.53 | 10.16 | 5.08 | 20.5 | 22.5 | 10.3 | 12.2 | 15.1 | 2.0 | 25.5 | 4.31 | 1.26 |
| C 2062H-SLR | 38.10 | 12.70 | 11.91 | 5.95 | 29.1 | 31.5 | 14.6 | 16.9 | 17.2 | 3.2 | 37.3 | 6.28 | 2.08 |
| C 2082H-SLR | 50.80 | 15.88 | 15.88 | 7.93 | 35.8 | 39.0 | 17.9 | 21.1 | 22.8 | 4.0 | 63.7 | 10.7 | 3.36 |
| C 2102H-SLR | 63.50 | 19.05 | 19.05 | 9.53 | 42.7 | 46.6 | 21.4 | 25.2 | 28.8 | 4.8 | 100 | 17.1 | 5.64 |

MAINTENANCE FREE CHAINS