



# Side Roller Chains

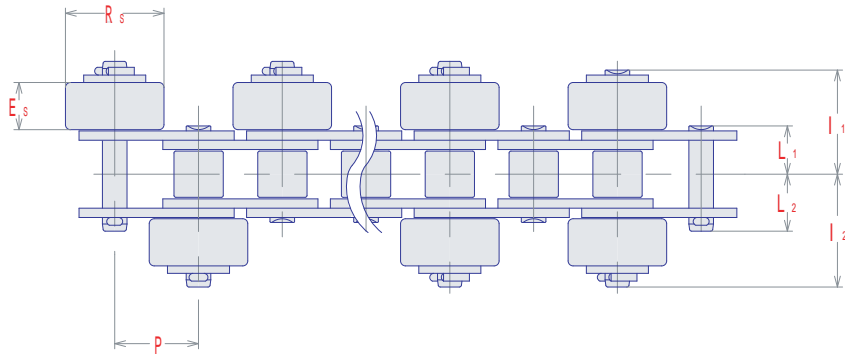

SY Chain No.	Dimensions - mm							Average Chain Weight kg/m	
	Pitch P	Side roller			Chain Pin		Riveted Side L1		Cotter Side L2
		Dia.	Width	Pin-Length					
		Rs	Es	l1	l2				
SY-40	12.70	15.88	7.6	17.3	19.1	8.2	10.3	0.86	
SY-50	15.875	19.05	9.2	21.4	23.1	10.3	11.6	1.40	
SY-60	19.05	22.23	12.5	27.9	30.0	12.7	14.9	1.93	
SY-80	25.40	28.58	15.6	34.8	37.8	16.2	18.8	3.30	
SY-100	31.75	39.67	18.5	41.9	45.5	19.6	23.2	3.57	
C2040	25.40	15.88	7.6	17.3	19.1	8.2	10.3	0.61	
C2050	31.75	19.05	9.2	21.4	23.1	10.3	11.6	1.01	
C2060H	38.10	22.23	12.5	29.5	31.6	14.4	16.7	1.65	
C2080H	50.80	28.58	15.6	36.5	39.5	17.8	21.1	2.74	
C2100H	63.50	39.67	18.5	43.4	47.0	21.1	24.6	4.15	
C2042	25.40	23.00	7.6	17.3	19.1	8.2	10.3	1.20	
C2052	31.75	27.00	9.2	21.4	23.1	10.3	11.6	1.65	
C2062H	38.10	30.00	12.5	29.5	31.6	14.4	16.7	2.60	

Average weight shows chains with plastic side rollers every second pitches on both sides.

# Special AA-1 Attachment Chains

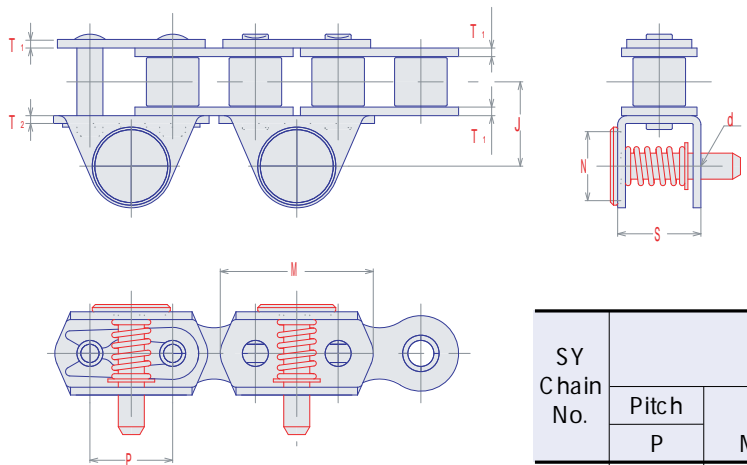

SY Chain No.	Dimensions - mm						Plate	
	Pitch P	M	N	J	S	d	Thickness	
							T1	T2
08B	12.70	23.5	12.9	15.3	16.0	5.15	1.5	1.5
10B	15.875	29.4	12.9	16.2	16.0	5.15	1.65	1.5