



サイドローラーチェーン

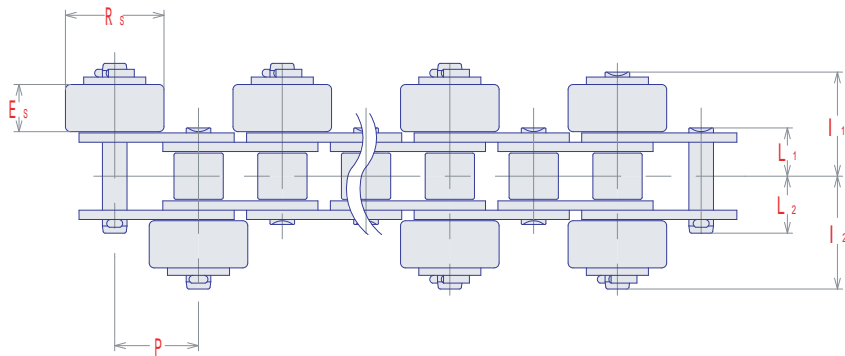

SY チェーン 番号	基本寸法- mm							概略重量 kg/m
	ピッチ P	サイドローラー			チェーンピン			
		径 Rs	幅 Es	ピンの長さ l1, l2		リベット側 L1	割ピン側 L2	
SY-40	12.70	15.88	7.6	17.3	19.1	8.2	10.3	0.86
SY-50	15.875	19.05	9.2	21.4	23.1	10.3	11.6	1.40
SY-60	19.05	22.23	12.5	27.9	30.0	12.7	14.9	1.93
SY-80	25.40	28.58	15.6	34.8	37.8	16.2	18.8	3.30
SY-100	31.75	39.67	18.5	41.9	45.5	19.6	23.2	3.57
C2040	25.40	15.88	7.6	17.3	19.1	8.2	10.3	0.61
C2050	31.75	19.05	9.2	21.4	23.1	10.3	11.6	1.01
C2060H	38.10	22.23	12.5	29.5	31.6	14.4	16.7	1.65
C2080H	50.80	28.58	15.6	36.5	39.5	17.8	21.1	2.74
C2100H	63.50	39.67	18.5	43.4	47.0	21.1	24.6	4.15
C2042	25.40	23.00	7.6	17.3	19.1	8.2	10.3	1.20
C2052	31.75	27.00	9.2	21.4	23.1	10.3	11.6	1.65
C2062H	38.10	30.00	12.5	29.5	31.6	14.4	16.7	2.60

Average weight shows chains with plastic side rollers every second pitches on both sides.

特殊AA-1アタッチメントチェーン

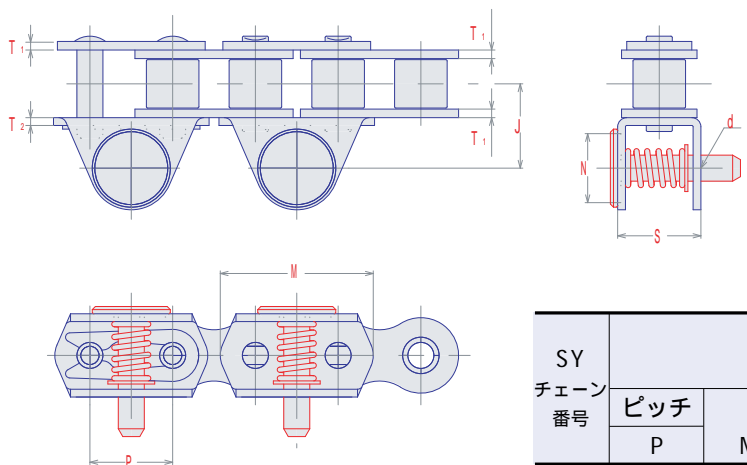

SY チェーン 番号	基本寸法 - mm						プレート	
	ピッチ P	M	N	J	S	d	厚さ	
							T1	T2
08B	12.70	23.5	12.9	15.3	16.0	5.15	1.5	1.5
10B	15.875	29.4	12.9	16.2	16.0	5.15	1.65	1.5